

Aqua Pod™ Handheld Remote Control

for

AQUA LOGIC®
Automation and Chlorination



Operation Manual

IMPORTANT SAFETY INSTRUCTIONS

When using this electrical equipment, basic safety precautions should always be followed, including the following:

- **READ AND FOLLOW ALL INSTRUCTIONS**
- **Warning - To reduce the risk of injury, do not permit children to use this product unless they are closely supervised at all times.**
- **Dry Handheld unit before charging.**
- **Do not allow charging base to come in contact with water.**
- **SAVE THESE INSTRUCTIONS**

Compatibility

This Aqua Pod handheld remote control is compatible with all Aqua Logic controls operating with software revision r2.60 or higher and using an AQL2-BASE-RF base station operating with software revision r3.00 or higher. Note that the Aqua Pod will NOT communicate with the AQL-BASE-RF base station. To verify the software level of your Aqua Logic control and base station, press the Menu button (possibly multiple times) until “Diagnostic Menu“ is displayed. Press the “>” or “<” keys (possibly multiple times) until the main software revision level is displayed (the revision should be 2.60 or higher). Next, press the “>” key (possibly multiple times) until the “RF Base” revision level is shown (the revision should be 3.00 or higher).

If the software revision level is less than those specified above, contact the Goldline Technical Service Dept. from Monday through Friday, 8AM to 8PM Eastern at 888-921-7665 for information on upgrades.

Installation

Installation

The Aqua Pod uses a rechargeable built-in battery pack which will require an initial charge when you first receive the unit. Charge the Aqua Pod for at least 5 hours before attempting to use it without the charger. Note that the Aqua Pod can be used normally while connected to the charger. Installation of the Aqua Pod requires that you follow the steps below.

- 1. Battery is installed at the factory:** Do not attempt to open the Aqua Pod.
- 2. Base Station required:** For operation of the Aqua Pod, the Aqua Logic control must have a base station (AQL2-BASE-RF) installed. The base station allows the Aqua Logic control unit to communicate with the Aqua Pod remote.
- 3. Teach the unique Aqua Logic ID code:** The base station attached to the Aqua Logic control has a unique ID code that ensures that your unit will not affect

other systems in the neighborhood, and likewise, their remotes will not affect your system. To teach the ID code to the Aqua Pod remote unit:

Settings
Menu

Teach Wireless:
+ to start

Press and hold
wireless button

Teach Wireless:
Successful

- a. On any Aqua Logic display/keypad unit press the “Menu” button (possibly multiple times) until “Settings Menu” is displayed.
- b. Press “<<” or “>>” (again, possibly multiple times) until “Teach Wireless” is displayed.
- c. Press the “+” button to start the teaching process.
- d. Press and hold any button on the Aqua Pod remote for 4 seconds. The Aqua Logic display should say “Teach Wireless: Successful”.

4. Installation is complete: you can now use the Aqua Pod remote.

Charging the Aqua Pod

Plug the included charging stand into a standard 120VAC wall outlet, away from the pool area. It is not recommended that you use an extension cord with this product near the pool. Slide the Aqua Pod into the charging stand and charge for at least 5 hours before attempting to operate remotely. Charge the Aqua Pod at temperatures between 32°F and 113°F (0° - 45°C). The Aqua Pod can be used while in the stand no matter what state the battery is in. A fully charged battery will provide about 300 one-minute uses under typical conditions.

About battery power:

When the Aqua Pod is not in the charging stand, the unit uses battery power and will take steps to extend battery life. After one minute of no button presses by the user, the unit will briefly display “Shutting down to save battery power” and will go into “sleep” mode. If the “System Off” button is pressed while the Aqua Pod is sleeping, all Aqua Logic outputs will turn off immediately. For all other buttons, the Aqua Pod will wake only. Once awake, any subsequent button presses will perform their normal functions.

When the Aqua Pod is in the charging stand, the unit uses wall power while it also charges the battery. It will always be “awake”, as long as it's sitting in the charger.

Note that the battery will slowly lose charge if the unit is not plugged into charging stand even if it is not used. The battery should be recharged every 4-5 days, depending on usage.

The Aqua Pod will display a series of information about its status and the status of the battery. Refer to the “Operating Status” section of this manual for an explanation of each of these displays.

NOTE: The built-in Lithium Ion battery pack is not replaceable and should offer at least 5 years of service.

Range and Location

The Aqua Pod is wireless and portable. Its unique weathertight housing and floating design allows it to be used outdoors, even while inside the pool or spa.

The Aqua Pod must be used within 200 ft. (assuming the signal will have to travel through walls) or 400 ft. (line of sight) from the Base Station which is typically mounted on the Aqua Logic main control unit at the pool equipment pad. Note that the AQL2-BASE-RF Base Station can also be mounted up to 500 ft. away from the Aqua Logic control unit to shorten the distance between it and any wireless remote. See the “Remote Mounting of the Base Station” section of the Base Station manual for more details.

The wireless remote display/keypad communicates with the base station on the Aqua Logic control unit using 900 MHz RF (frequency hopping spread spectrum) technology.


If the display information is not being updated on a regular basis or if the Aqua Logic is not responding to buttons being pressed, then refer to the Troubleshooting section for assistance in resolving these problems.

Operation

The Aqua Pod handheld control gives the user the power to program all the operating parameters of the Aqua Logic control system remotely as well as viewing equipment status and temperatures. The following information discusses the Aqua Pod's display and pushbuttons.

Aqua Pod Display

Refer to the diagram and corresponding information below.

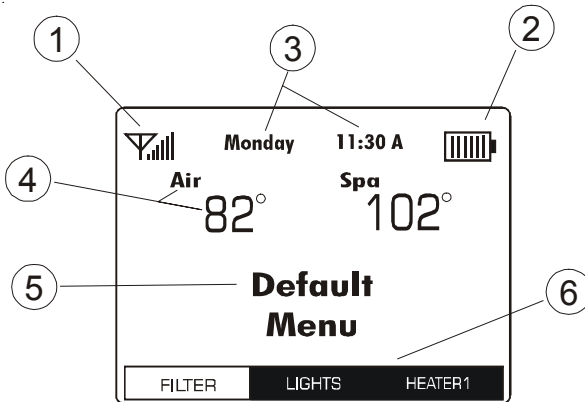

1. Signal Present

The Signal Present icon shows the status of the radio connection between the Aqua Pod and the AQL2-BASE-RF base station. When the icon appears, there is adequate signal strength for communication between the Aqua Pod and the AQL2-BASE-RF. When no icon is displayed, the signal is too low for communications. Note that signal strength will decrease as the Aqua Pod is moved further away from the AQL2-BASE-RF or if obstructions such as walls, fences, etc. are located between the Aqua Pod and AQL2-BASE-RF.

2. Charging Indicator

The Charging Indicator will display when the Aqua Pod's battery is charging. This occurs when the Aqua Pod is sitting in the charging stand and the stand is plugged into the wall. During charging, the battery bars will move from left to right. When the battery is fully charged, the Charging Indicator will stop moving and show all bars.

Note that when the battery charge is low, the message “Please plug in to charge battery” will appear every few seconds. If the battery charge gets too low to continue powering the Aqua Pod, the display will show “Battery dead! Please charge now”.

3. Day/Time, System Off and Check System error

Normally, the day of the week and time is shown in this location on the display. The day and time are sent from the Aqua Logic automatically. Note that all timers will refer to this information for starting and stopping timed events. If this information is not accurate, pool/spa equipment may not run properly.

When the Aqua Logic is in System Off mode, “System Off” will blink in this location on the display. When an error occurs that requires someone to check the system, “Check System” will blink in this location on the display. Refer to the Aqua Logic manual for Troubleshooting.

4. Pool, Spa and Air Temperatures

This location of the display will show the pool, spa and/or air temperatures depending on how the system is configured. Note that “---” is displayed in place of the Pool or Spa temperature if the filter pump is off. “Err” is displayed when a temperature sensor or its wiring is either open or shorted.

5. Menu

This location on the Aqua Pod's display is used for the direct communication to the Aqua Logic control system. Access to the Aqua Logic menus and submenus are displayed here. This information follows the Aqua Logic's local display, as well as any other remote control connected to the system. Any programming changes made from the Aqua Pod, Aqua Logic or any remote in the system will be displayed here. When no changes have been made from any location for more than 2 minutes, the Aqua Pod will scroll through each display of the Aqua Logic's default menu. Refer to the Aqua Logic Installation and Operation manuals for more information.

6. Softkeys


The Aqua Pod allows for easy On/Off/Auto control of your pool equipment. Using the Aqua Pod's softkey pushbuttons, any of your pool's equipment shown in this location of the display can be turned On/Off or returned to automatic operation. When equipment assigned to a softkey is on, the equipment name will be displayed behind a solid backfill (see diagram on page 3). When the output is off, the name will be displayed with no backfill.

Aqua Pod Pushbuttons

Refer to the corresponding information and the diagram on page 5.

1. SoftKey Pushbuttons

Three softkey pushbuttons are provided to allow the user to conveniently turn on or off pool equipment that has been previously designated in the Scroll Softkeys and Softkey Set Mapping menus. Refer to Softkey Set Mapping section on page 6 for information on how to assign specific pool equipment to each softkey or to change the assigned keys.

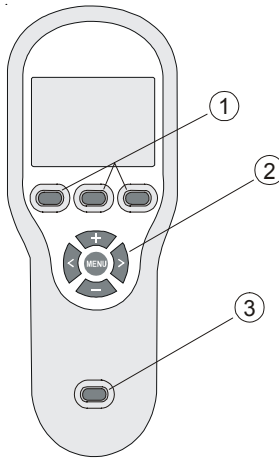

2. Aqua Logic Programming Pushbuttons

These keys are used for programming and controlling the Aqua Logic. They operate in the same manner as the Aqua Logic's local keypad buttons. Refer to the Aqua Logic Installation and Operation manual for detailed information on the use of these buttons.

3. System Off

Pressing this button will turn all Aqua Logic outputs off, even if the unit is asleep. They will remain off regardless of any programmed control logic until the System Off button is pushed again (on this or any other remote control) or the "SERVICE" button is pressed on the Aqua Logic's local display/keypad. If the Aqua Pod is asleep, waking it by pressing this button will shut all of the Aqua Logic's outputs off.

NOTE: System Off is not implemented for the Aqua Logic P-4 (AQL-P-4) and Aqua Plus (AQL-PLUS) using software revision r2.60.

Aqua Pod Operation

The Aqua Pod will control and program the Aqua Logic in the same manner as the local keypad/display except for the differences described below. Complete instructions on how to program and view/change settings are available in the Aqua Logic Installation and Operation manuals. Use the Aqua Pod's programming buttons for these commands.

Aqua Pod Backlight

Unlike the local keypad/display and other Aqua Logic remotes, the Aqua Pod's backlight cannot be set to "Always on". At any menu, the backlight operates in the following manner:

- Press and hold "+" key for 1.5 seconds - backlight turns on for one minute
- Press any key while backlight is still on - one minute timer starts over
- Press and hold "-" key for 1.5 seconds - turns backlight back off

SoftKeys

The following two menus are available for the Aqua Pod but are not shown in the Aqua Logic menu. These menus are directly accessible by repeatedly pushing the Aqua Pod's MENU button. Refer to these menus and the information on page 6 to map and operate softkeys.

Select Softkeys

<previous next>



Press repeatedly until "Select Softkeys" menu is displayed



Scrolls through available Softkey Sets

Select Softkey Set

Use the "<" or ">" keys to scroll through all Softkey Sets. A Softkey Set is a group of three pieces of pool equipment that can be controlled by the three softkey pushbuttons. The Softkey Sets are displayed in the Softkeys portion of the Aqua Pod's display. Each softkey pushbutton controls the equipment that is displayed directly above it. You can define and make changes to Softkey Sets in the Softkey Set Mapping menu.

Map Softkeys
locked



Press repeatedly until "Map Softkeys locked" menu is displayed



Press BOTH buttons SIMULTANEOUSLY for 5 seconds to unlock


Softkey Set Mapping

Push the "<" and ">" for 5 seconds to unlock and enter the Softkey Set Mapping menu. After entering this menu, one of the displayed softkeys will be flashing. The flashing selection can be changed by pressing the "+" or "-" keys. When the desired selection is displayed, press the "<" or ">" keys to advance to the previous/next softkey. Create all desired softkey sets using this procedure.

Refer to the diagram below for more information.

Softkey Set Mapping

After entering the Softkey Set Mapping menu, refer to the diagram below for mapping information. After exiting the Softkey Set Mapping menu, the Aqua Pod will return to normal operation.

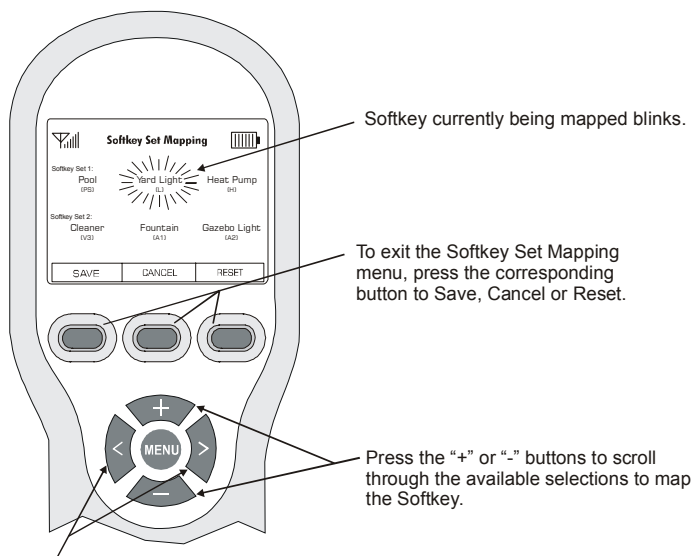

Press the "<" or ">" buttons to move to the previous/next Softkey set. Note that the selection will blink while being mapped.

You can SAVE, CANCEL or RESET at any time within the Softkey Set Mapping menu by pressing the corresponding softkey pushbutton below.

SAVE - This selection will save all changes that have been made to the softkey sets since entering the menu.

CANCEL - This selection will cancel all changes that have been made since entering the Softkey Set Mapping menu and revert back to the previously saved selections.

RESET - After prompting for confirmation, this selection will revert the Softkey Sets to the original factory default settings. All saved selections will be lost.

Operating Status

Because the Aqua Pod is battery operated, it displays various information about its condition and the status of its battery. Refer to the section below for an explanation of these displays:

Shutting down to
save battery power

When not in the charging stand, the Aqua Pod will briefly show this display and go into “sleep” mode after one minute if no buttons are pressed. This mode conserves the battery power while the remote is not in use. While asleep, the display will be off. To “wake” the unit up, push any button on the keypad.

Aqua Pod is now
refreshing display

When the Aqua Pod “wakes”, it will show this display while it collects status information from the Aqua Logic control unit.

Please plug in to
charge battery

When the battery is low, the Aqua Pod will alternate between this display and the normal status display. Under typical conditions, there are at least 10 more one-minute uses available when this display is first shown. The battery will slowly lose charge if the unit is not put into the charging stand.

Battery dead!
Please charge now!

This display is shown briefly, immediately before the unit shuts down. The Aqua Pod will not operate again (to protect the battery) until it is inserted into the base charger.

Using wall power
Battery charging now

This display is shown briefly when the Aqua Pod is first placed in its charging stand.

TROUBLESHOOTING

1. **Can't find the "Teach Wireless" display:** From the Aqua Logic control (or any direct wired display/keypad) press the "menu" button (possibly more than once) until "Settings Menu" is displayed. Next, press the "<" or ">" buttons (possibly more than once) until the "Teach Wireless" display appears. If you get to the point where "Settings Menu" appears again, then this means that the Aqua Logic control unit is not communicating with the base station. Check that the 4 wire cable from the base station is plugged into the "wireless" connector on the main printed circuit board. If this connector is already plugged in (for more than 30 seconds), then call Goldline Technical Service for assistance.
2. **"Teach Wireless" failed:** Ensure that the remote is powered when pressing the button. This is indicated by any message on the display of the remote. If the remote is powered, then the next most likely cause is that the distance between the base station and the remote is too great—try moving the remote closer to the base station.
3. **Unreliable communication with remote devices:** The most likely cause is that the distance between the base station and the remote is too great—try moving the remote closer to the base station.
4. **Wireless display/keypad not functioning (no display):**
If the display/keypad located on the main unit is working correctly, check that there is battery power to the Aqua Pod. Plug the charging stand into an active 120VAC outlet and insert the Aqua Pod. The display should activate and Aqua Pod should function normally.

5.

The last keypress
was not received

This is usually a temporary problem caused by interference from other equipment that is using the same radio frequency. Try pressing the button again.

6.

The base station
is not responding

If this is the first time you are using your remote, or if you have just installed a new base station, run the "Teach Wireless" procedure from any other Aqua Logic wired display/keypad. Also, the radio signal may be too weak—try pointing the remote in the direction of the pool equipment or try moving closer to the pool equipment.

7.

Teach Wireless needs
to be run

Refer to page 1. Run the "Teach Wireless" procedure from any other direct wired Aqua Logic display/keypad.

8.

Teach Wireless Fail.
Please try again.

This is usually caused by a button being held down for more than 4 seconds, falsely triggering the Teach Wireless mode. It can also be displayed if the Aqua Logic is not in the Teach Wireless mode. If the Aqua Logic is in Teach Wireless,

then the radio signal may be too weak—try moving closer to the Aqua Logic main control unit base station.

9.

Display Error x call 888-921-7665

An internal problem has occurred in the Aqua Pod. Call the Goldline Tech support department (Monday through Friday, from 8AM to 8PM eastern time) to find out how to obtain a replacement wireless remote display/keypad.

10. Blank screen or erroneous display after "wake" up:

If the Aqua Pod's screen is blank or displays the wrong information after "wake" up, press the MENU button. This will refresh the display and should correct the problem.

11. Softkeys do not respond:

There are sporadic reports of Softkeys occasionally not functioning while other keys continue to function normally. If this happens, reset the Aqua Pod by pressing the "System Off" button (bottommost key on the Aqua Pod) while pressing and holding the "<" button. The display will clear and the Aqua Pod will go through a brief start up routine before functioning normally.

12. "Refreshing Display" continuously displayed:

If the Aqua Logic's power is off, the Aqua Pod will display this message. In this case, returning power to the Aqua Logic or "reteaching" (see Installation instructions) the Aqua Pod will correct the problem.

13. Teach fails:

The Aqua Pod can only be used with the AQL2-BASE-RF base station. Be certain that the proper base station is being used. When teaching, be certain that the Aqua Logic control shows "press and hold wireless button" and that the Aqua Pod is close to the Aqua Logic.

14. Interference with 900MHz devices (baby monitors, video monitors, etc.):

To determine if there is a problem, be certain that the interference stops when the Aqua Logic's power is turned off. If so, try different channels on the affected device. Also, try changing the Aqua Logic's wireless channel. This is described in the Aqua Logic Installation manual. Note that some interference may not be able to be resolved.

15. Frequent "last keypress was not received" messages:

This message may be due to interference with other 900MHz devices or because the Aqua Pod is being used outside of the usable range. Follow step 14 above to determine if there is an interference problem. If the Aqua Pod is too far from the base station, consider locating the base station closer by using the Remote Mount Kit.

LIMITED WARRANTY Goldline warrants its Aqua Rite, Aqua Rite Pro, Aqua Trol, Aqua Logic and Pro Logic products (products with Goldline part numbers starting with AQ-RITE-, AQ-RT-PRO, AQ-TROL-, AQ-LOGIC-, AQL-P-, AQL-PS-, AQL-CL-, PL-P-, PL-PS-, and HPC-2) to be free from defects in material or workmanship, under normal use and service:

For **three years** from the date of the initial system installation on private, residential swimming pools within the USA or Canada and **one year** from the date of initial system installation on commercial installations, installations outside of the USA or Canada and for any replacement parts or accessory products, provided they are installed in accordance with the Goldline installation instructions and specifications provided with the product. If written proof of the date of the initial system installation is not provided to Goldline, the manufacturing datecode on the Aqua Rite, Aqua Rite Pro, Aqua Trol, Aqua Logic and Pro Logic electronics unit will be the sole determinant of the date of the initial system installation.

For residential installations in USA or Canada: If a product is defective in workmanship or materials and is removed and returned freight prepaid within three (3) years after the date of the initial system installation, Goldline will, at its option, either repair or replace the defective product and return it freight prepaid.

For commercial installations, installations outside the USA and Canada, and accessory products and replacement parts: If a product is defective in workmanship or materials and is removed and returned freight prepaid within one (1) year after the date of the initial system installation, Goldline will, at its option, either repair or replace the defective product and return it freight prepaid.

Contact any Goldline dealer or contact Goldline at 61 Whitecap Drive, North Kingstown, RI 02852 for warranty service. The costs incurred in removal and/or reinstallation of the product are NOT covered under this warranty. Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you.

WARRANTY EXCLUSIONS:

1. Material supplied or workmanship performed by others in process of installation.
2. Damage resulting from improper installation including installation on pools larger than the product rating.
3. Problems resulting from failure to operate the product(s) in accordance with the recommended instructions contained in product's owners manual(s).
4. Problems resulting from failure to maintain pool water chemistry in accordance with the recommendations in the owners manual(s).
5. Problems resulting from tampering, accident, abuse, negligence, unauthorized repairs or alternations, fire, flood, lightning, freezing, external water, degradation of natural stone used in or immediately adjacent to a pool or spa, war or acts of God.

DISCLAIMER. THE EXPRESS LIMITED WARRANTY ABOVE CONSTITUTES THE ENTIRE WARRANTY OF GOLDLINE WITH RESPECT TO ITS POOL AUTOMATION AND CHLORINATION PRODUCTS AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE. IN NO EVENT SHALL GOLDLINE BE RESPONSIBLE FOR ANY CONSEQUENTIAL, SPECIAL OR INCIDENTAL DAMAGES OF ANY NATURE WHATSOEVER, INCLUDING, BUT NOT LIMITED TO, PERSONAL INJURY, PROPERTY DAMAGE, DAMAGE TO OR LOSS OF EQUIPMENT, LOST PROFITS OR REVENUE, COSTS OF RENTING REPLACEMENTS, AND OTHER ADDITIONAL EXPENSES, EVEN IF THE SELLER HAD BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. SOME STATES DO NOT ALLOW THE EXCLUSION OF LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU.

NO WHOLESALE, AGENT, DEALER, CONTRACTOR OR OTHER PERSON IS AUTHORIZED TO GIVE ANY WARRANTY ON BEHALF OF GOLDLINE.

THIS WARRANTY IS VOID IF THE PRODUCT HAS BEEN ALTERED IN ANY WAY AFTER LEAVING THE FACTORY.

Li Ion Battery Disposal

At the end of the battery's useful life, it must be recycled or disposed of properly. Contact your local county, or state hazardous waste management authorities for information on recycling or disposal programs in your area.

FCC Statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by Goldline Controls could void the user's authority to operate this equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

Industry Canada Statement

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

The term "IC" before the certification / registration number only signifies that the Industry Canada technical specifications were met.

For French version of this manual, go to www.goldlinecontrols.com.

Questions?

Refer to **www.goldlinecontrols.com** for latest manual revisions, additional information and helpful service.

Or, you may visit your local Authorized Goldline Dealer or call 888-921-POOL (7665) for assistance.



North Kingstown, RI 02852 USA

092146F
Copyright © 2008 Goldline Controls, Inc